

10" x 10" SOSTÓS II

Logos Imaging's SOSTÓS complements the range of our newest and most rugged DR Imaging Systems.

- Glass-free
- On-board calibration
- Zero RF signature on startup with on/off switch for wireless communications
- All batteries used in the system are removable
- Automatic Exposure Detection (AED) with no additional accessories
- Android compatible



SOSTÓS II DR System SPECIFICATIONS

Technology	Amorphous Silicon with TFT
Weight	2.8 lb (1.3 kg) including battery
Battery life	3 hours
Dimensions (Panel)	11.02" x 11.14" x 0.6", 283 x 283 x 15 mm
Pixel Area	10.1" x 10.1", 258 x 258 mm
Pixel Size	168 µm
Limiting Resolution	2.98 lp/mm
AD Conversion	16 bits
Communications Interface	Wireless IEEE 802.11ac Wired LAN
Communications Range	Wireless 150 m with standard antenna*; Wired 25 m with standard cable reel; Additional network options available

* Line of Sight; higher gain antennas available for longer range.

Features

- IP67 and Glass-Free
- 3 mm bottom and side border with 83% Fill Factor
- Under 11 lb (5kg) in typical backpack setup
- AED mode with no on-site connection needed



Contact Logos Imaging

Mailing Address

P.O. Box 576, Windsor, CO 80550


Shipping Address

4523 Endeavor Drive, Unit B, Johnstown, CO 80534

Toll Free (866) 939-4044
Office (765) 939-4044
Fax (765) 939-4040
Email sales@logosimaging.com
Web www.logosimaging.com



LOGOS IMAGING

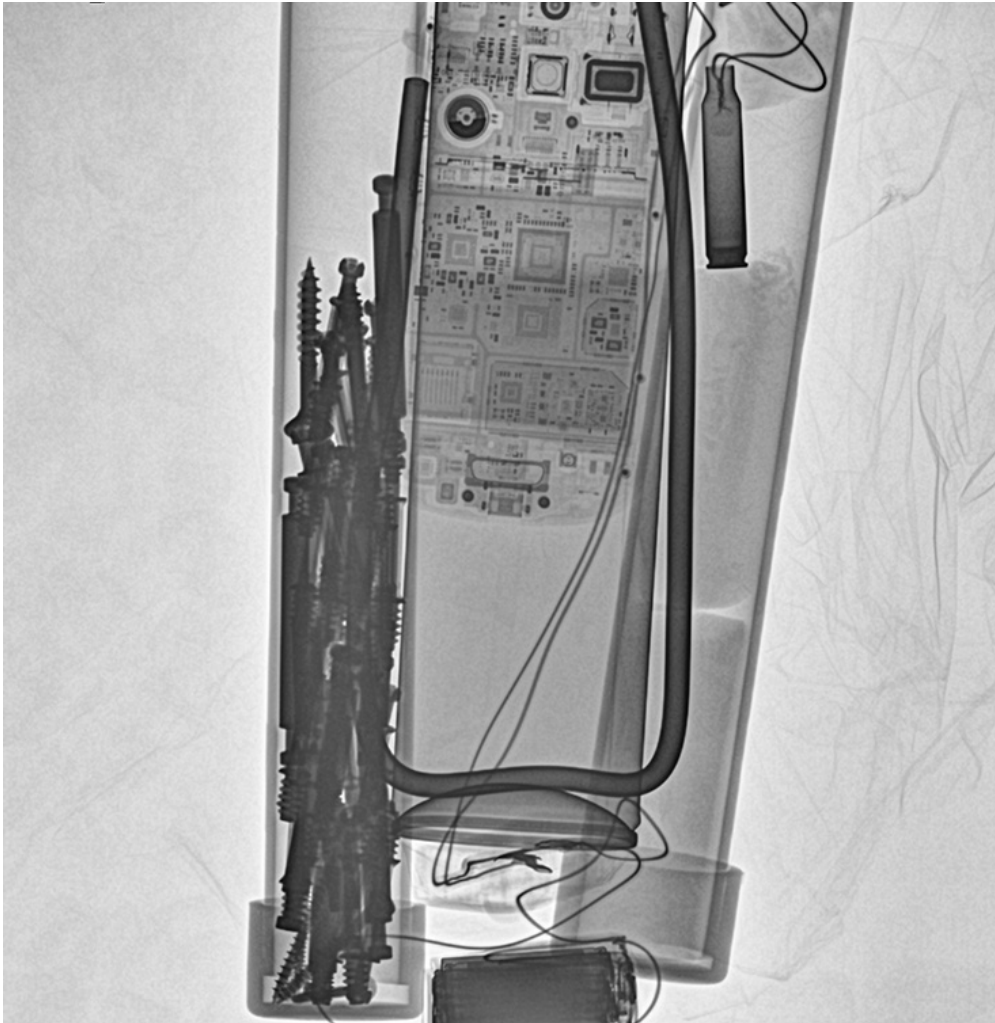

Sample image taken with XR150 20V (15 pulses) on SOSTÓ panel from 1 meter.

Get with our Team to set up a demo date.

